



KSMJ-72V Single-Knit Mini-Jacquard Knitting Machine







KEUM YONG'S KSMJ -72V

Model is the latest 3-position technology for advanced single knit mini-jacquard machine. Patterns are adjusted by hand. Fast, simple and unlimited 3-position (knit.tuck.welt) technique to produce any pattern.

STANDARD SPECIFICATIONS

DIAMETED	GAUGE(N.P.I)				FEEDS	SPEED(R.P.M)
DIAMETER	20	22	24	28	LEED2	OF LLD (IT.IT.IVI)
26″	1620	1800	1944	2268	62F	22-27
• 30″	1972	2052	2268	2628	72F	20-25
34"	2160	2376	2592	2952	84F	18-22

Note: speed is depending on fabric structure and yarn material


- *The cylinder cam has 3 position needle selection by 37 steps selector with semi closed cam system
- * Every cylinder needle can be moved to the miss, knit, tuck position.

PATTERN AREA


2 Color Jacquard	3 Color Jacquard		
36 course × 36 wales	24 course × 36 wales		
36 course×72 wales (mirror)	24 course×36 wales(mirror)		

FABRIC POTENTIAL

- *Single jersey plain, tuck patterns, inlay patterns, 2 and 3 color pattern.
- * Mirror or diagonal repeat jack set out.

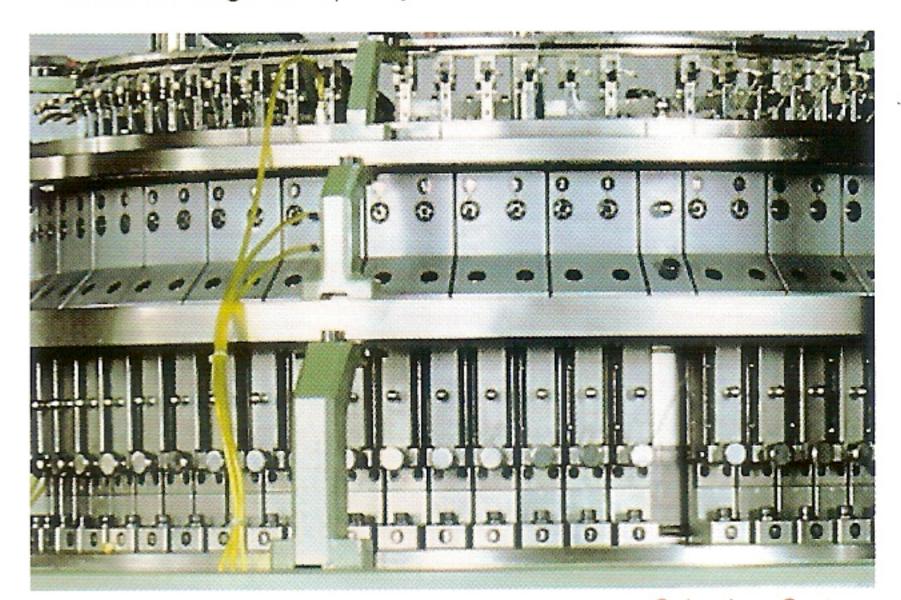



Selection System

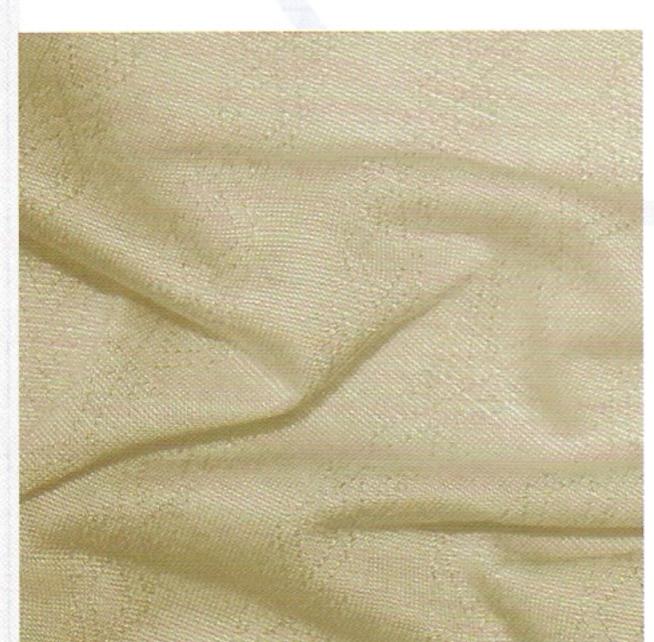



INTEGRATED CONTROLLER

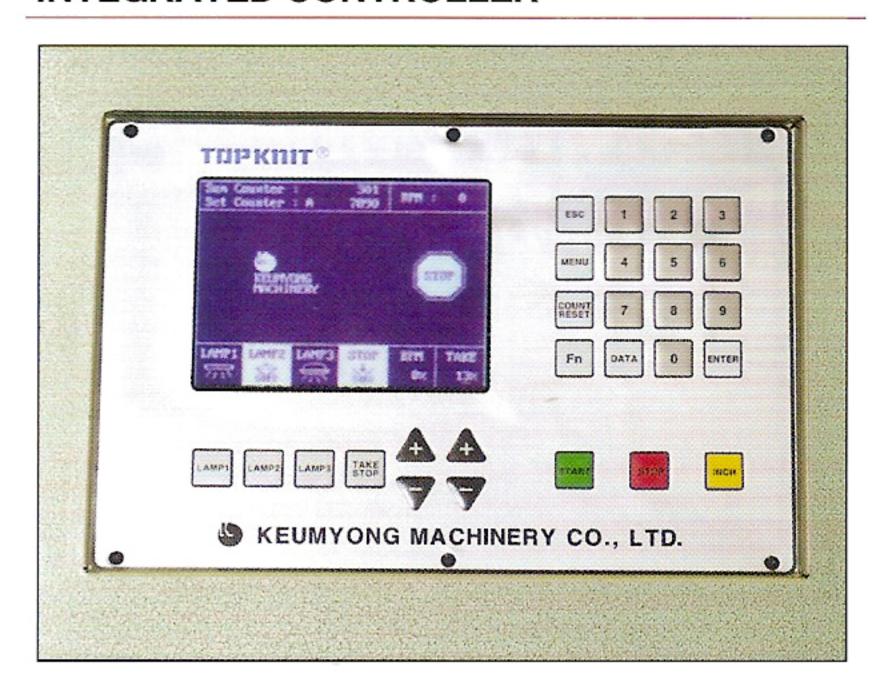

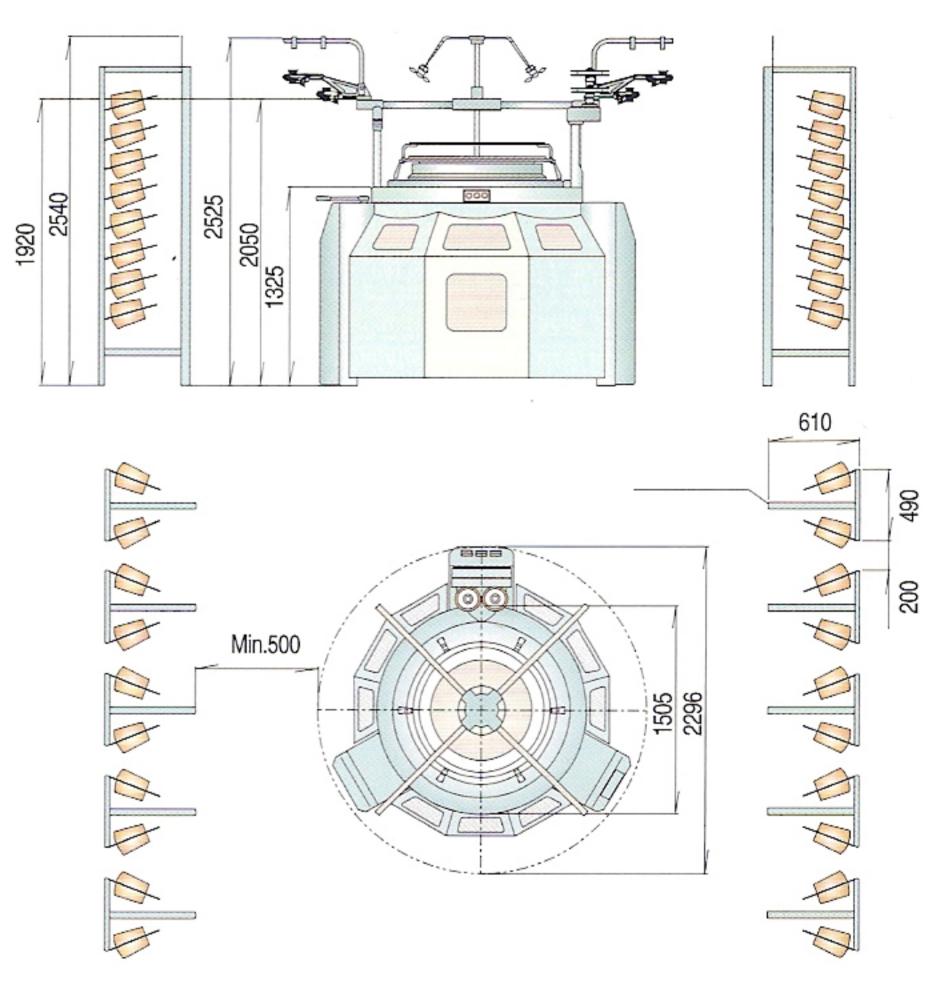

MODEL: KSMJ-72V / 30"

PACKING DIMENSIONS

KSMJ-72V	30" DIAMETER		
Approx. Net weight	2.400Kg		
Approx. Gross weight	2.900Kg		
Case size(mm)	Length Width Height 2440×2250×2250		





• Head office & Mfg: 666-1, 3-Ga, Nowon-Dong, Buk-Gu, Daegu, Korea

Telephone: (053) 351-3081~7 Fax: (053) 352-8085

• Seoul Office : 81-3 Song jung-Dong, Sung Dong-Gu, Seoul, Korea

(KEUMYONG BLDG. 4TH FLOOR)

Telephone: 82-2-3409-4700 / 4231~3 Fax: 82-2-3409-4040

http://www.keumyong.com
E-mail:kymc@keumyong.com